# **Choice** Office Cabinets



# **CHOICE cabinets**



# FEATURES

- Wide range of different cabinets
- Ability to fix one cabinet onto another
- 6 different heights
- Different materials combination
- Wide range of additional parts for individual storage combination

## QUALITY STANDARD

- LST EN 14073-1:2004
- LST EN 14073-2:2004
- LST EN 14073-3:2004
- LST EN 14074-2004

# **TECHNICAL INFORMATION**

## Carcass

• 18 mm MFC (melamine) with 1 mm ABS edging.

## Top and bottom

• 18 mm MFC (melamine) with 1 mm ABS edging.

## Back

• Made of 18 mm MFC (melamine).

## Shelves

- 18 mm MFC (melamine) with 1 mm ABS edging. Load capacity 25 kg;
- 25 mm MFC (melamine) with 2 mm ABS edging (for W=1000 mm wide carcass). Load capacity – 32 kg;
- 28 mm. Made of metal sheet. Load capacity 32 kg,
- Zo mm. Made of metal sheet. Load capacity 40 kg,
  Eived or height adjustable shelves
- Fixed or height adjustable shelves.

## Doors

- Doors with hinges in 18 mm MFC (melamine) with 1 mm ABS edging;
- Sliding doors in 18 mm MFC (melamine) with 1 mm ABS edging (with plastic runners).
- 107° opening angle with soft closing function.


## Acoustic doors

- Made from acoustic chipboard, melamine faced surface with 2 mm ABS edging;
- Absorption class: C;
- Weighted sound absorption coefficient: αw = 0,75 (MH);
- SAA (Sound Absorption Average): 0,83;
- NRC (Noise Reduction Coefficient): 0,85.



## Handles (2 types)

- Handles (EG, MG, AG, T1G, EX, MX, AX, T1X) made from powder coated metal, hole for fixing – 128 mm;
- Recessed handles 145x42x15 mm (EC, MC, AC, T1C) from aluminium, powder coated.



### Bases

#### Plinth (MFC)

- Made of 18 mm MFC (melamine), H=80 mm;
- Height levelling +10 mm.

#### Plinth (metal)

- Made from welded metal tube, H=40 mm;
- Height levelling +10 mm.

#### Metal legs H=80 mm

- Metal tube 20x20 mm;
- Plastic legs with height levelling, H=80 mm +10 mm;
- Powder coated metal.

## Fittings

- CAMS with connecting bolts;
- Lock without metal bars;
- Fast assembling hinges (does not require any tools to connect hinges to plates);
- Sliding doors with plastic runners;
- Wardrobe with metal pull-out hanging rail (cabinets depth 420 mm).

#### Metal legs H=150 mm with frame

- Welded metal tube 20x20 mm;
- Plastic legs with height levelling, H=150 mm +10 mm;
- Powder coated metal.

#### **Plastic legs**

Black plastic height levelling legs, H=17 mm +10 mm.

#### Solid wood legs H=150 mm

- Lacquered and stained light grey or black ash solid wood base, H=150 mm;
- Height levelling +10 mm.

#### Castors

- Four twin wheel castors, Ø80 mm;
- Two out of four with stopper brakes;
- The load capacity: 100 kg per castor.

## Additional parts

#### Shelves for letters (Post shelf)

• 16 mm MFC (melamine) with 1 mm ABS edging.

#### Shelf/Shelf with dividers

- 18 / 25 mm MFC (melamine) with 1 mm ABS edging;
- Chromed dividers from metal (7pcs.) (Only for shelves with dividers).

#### Drawers for foolscap

- File drawers for both A4 and foolscap files;
- Full extension with anti-tilt function;
- Made of welded metal sheet, without bottom. Powder coated (black);
- Ball bearing slide, load capacity 50 kg.

#### Pencil tray (stationery drawer)

- Tray from black plastic. W=380 mm (with mounting brackets) L=375 mm, H=32 mm.
- Ball bearing slide full extension;
- Mounted under cabinet top, or shelves;
- Load capacity 2 kg (EN 15338).

#### Wire Frame for foolscap / A4 (Frame-mounted binders)

- Dimensions: W=340 mm, D=305 mm, H=245 mm;
- · Galvanized wire with black plastic corners.



#### Cushion

- 3 different sizes: 790x390x32, 990x390x32, 1190x390x32 mm;
- Cushions are for 1H and 2H cabinets. They are fixed on the top of the cabinet using velcro tape;
- Two cushions (790) are needed for cabinets with width of 1600;
- HR5050 foam rubber is used in pillows production.

#### Fabric back panel

• HDF 3 mm coated with foam 3 mm and fabric (fixing with glue stickers).

#### Side and top panels

- 16 MFC with 1 mm ABS edging;
- 16 mm chipboard, covered in wood veneer with 1,5 mm edging.

#### Stickers


• Adhesive stickers (H=0,13 mm) for fixing one cabinet on the top of another without any tools.

#### Counterweight


- 8 mm powder coated metal plate (grey colour by default), fixed with screws under the bottom;
- 25 mm MFC (melamine) with two 0,5 mm ABS edges, fixed with stickers to the back panel inside the cabinet.

## RANGE


## Bookcases

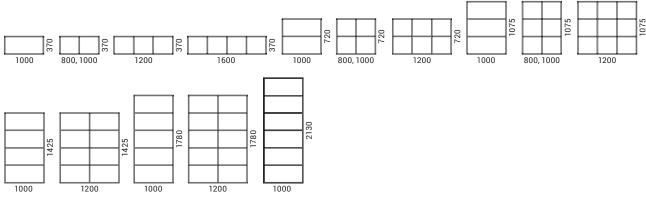


## Cabinets

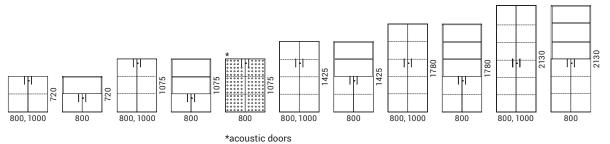


#### Cabinets with sliding doors










D=400 mm / 420 mm (with doors)



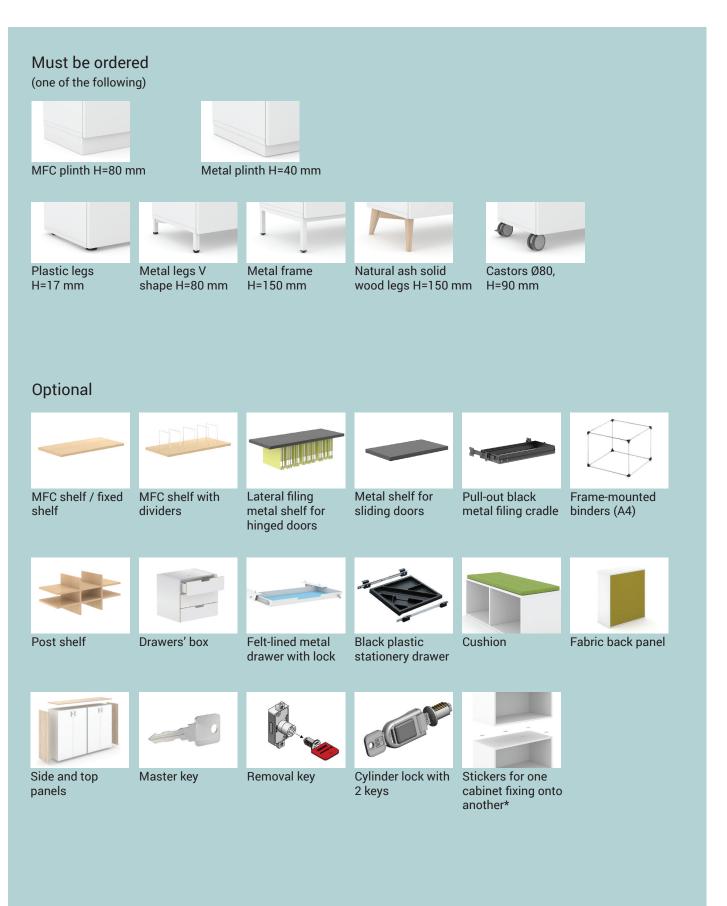

\*Customize your storage by fixing one cabinet onto another.

! When you exceed the height of 1780 mm, it is recommended to consult with your dealer.

## ADDITIONAL INFORMATION



- Please note that the overall height of the cabinet will increase by 18 mm when placing one cabinet on top of each other (e.g. 1H+1H). This may result in differing overall heights between the cabinets or with desks. Also, note that side panels C0Z007-C0Z025 will not be suitable for cabinet combinations.
- Please note glue on the stickers take time to harden (50% in 15 min, 90% in 24 h and 100% in 72 h). It is advised to wait before first using the cabinet. It is possible to split the cabinets again by carefully removing the top part and cleaning the residual glue with everyday cleaning solvent (e.g. turpentine).

Tips for fixing one cabinet onto another:
 If the combination is higher than 3H, it is recommended to choose a solid base, e.g. metal plinth or plinth, with metal frame (C0Z080 / C0Z081 / C0Z082 - C0Z160 / C0Z161 / C0Z162);

- Compositions exceeding 5H height must be mounted to the wall;

- Additional mounting to the wall and strengthening with wood screws is recommend for cabinets with hinged doors or drawers.



 Please note that shelving units are 400 mm deep, cabinets with hinged doors – 420 mm deep and cabinets with sliding doors are 400 mm deep. Panels C0Z007-C0Z025 are 420 mm deep and will stand out by 20 mm on shelving and sliding door units.



 Fabric back panels of 3H and higher cabinets (C3S160, C4N120, C4S120, C4S121, C4S160, C5S120, C5S121) are made of two pieces.



 Please note that the cushion is suggested for 1H and 2H cabinets and only for short sit up. 1H and 2H cabinets can hold up to 110 kg.



 Please note that when ordering cabinet in two colours (C4N120, C5N120, C6N120), the colour of the connection will also be visible on the backside of the cabinet.





 In the open position, the sliding inner (right) door is visible. There is a gap of 25 mm between the handle and the edge of the left door. Door brakes can be re-assembled (only for cabinet with type "C" handle), if required, and the door will fully open (more information in assembly scheme).



• Central legs (C0Z004, C0Z122, C0Z162, C0Z006) of 1200 mm and 1600 mm width cabinets can be mounted in 2 positions, so there is a possibility to choose the less visible option.





• All bases (plinth, legs, etc.) are slightly recessed from the back of the cabinet due to storage stability and design. Please note that the cabinet cannot be placed against the wall completely if there is a floor plinth.



When ordering cabinets with pull-out metal filing cradles (C0Z044, C0Z045, C0Z046, C0Z047), it is recommended to order counterweights X0Z020 / X0Z021 / X0Z022 or fix cabinets to the wall / other stable furniture. Please note, that in the set of metal pull-out filing cradles (2 pcs) there is an anti-tilt mechanism, i.e. both cradles cannot be opened at the same time.





• A4 suspension files can only be hanged on lateral filing metal shelves (C0Z038 and C0Z039) in cabinets with hinged doors. The suspension files will not fit on metal shelves (C0Z040, C0Z041, C0Z042, C0Z043) in cabinets with sliding doors.



Additional shelves can be ordered for the lower part of the wardrobe.



 6H cabinets always must be fixed to the wall. Wall mount fittings are included with 6H cabinets, additional order is not required. Mounting to the wall is chosen by installer according to the wall type.

 At least one fixed shelf (C0Z034, C0Z0345) or one metal shelf (C0Z038, C0Z039) must be ordered with 4H, 5H and 6H cabinets with doors and without shelves (C4C080, C4C100, C5C080, C5C100, C6C080, C6C100).




	2H	ЗН	4H	5H	6H
Quantity of pull-out metal filing cradles					
X 1	C / PDmm	C (C)	C / Horan	C / (Pomme	- Constant of the second secon
X 2	C / CD	C (C)		(Horania)	
X 3*	$\otimes$	↓ C ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓			-
X 4*	$\otimes$	$\otimes$	$\otimes$	- municipal de la construcción d	- -
X 5*	$\otimes$	$\otimes$	$\otimes$	$\otimes$	

\* Anti-tilt (G6F116) must be ordered.

Must be ordered. Please order the counterweight or fix cabinets to the wall / other stable furniture.

It is recommended to order the counterweight or fix cabinets to the wall / other stable furniture. Note! For cabinets with plastic legs it is necessary to order the counterweight or fix cabinets to the wall / other stable furniture.

Must be fixed. Please fix cabinets to the wall / other stable furniture.



((((((C

294 Kifisias Av., 15232 Chalandri-Greece - T 2106844905- E. info@asset.gr - asset.gr