
Grid Canopy Soundabsorbing Grid





TAPERED & OVAL GRID CANOPY



Customized by OMICRON AEC. Photographed by Upper Left Photography.



Suspended ezobord Grid Canopies bring room acoustics to an entirely new level. Control room reverberation in both monotone and duotone color options.


A new generation surface material that both absorbs noise and is fully customizable.

Ceiling mounted for both sound absorption and aesthetic purposes, ezoBord Grid Canopies reduce echo and unwanted noise in boardrooms, meeting areas, open plan offices or a variety of public spaces. Grid Canopies assemble in just a few minutes, are super light weight and easy to suspend from any ceiling with several suspension hardware options to choose from.

Made with recycled plastic water bottles.



STANDARD SHAPES

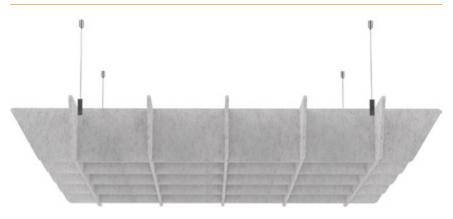


Tapered Grid Canopy

PART NUMBER	LENGTH	WIDTH	HEIGHT
wvc-tgd-4848-06	48" (1219mm)	48" (1219mm)	6" (152mm)
wvc-tgd-4848-10	48" (1219mm)	48" (1219mm)	10" (254mm)
wvc-tgd-4860-06	48" (1219mm)	60" (1524mm)	6" (152mm)
wvc-tgd-4860-10	48" (1219mm)	60" (1524mm)	10" (254mm)
wvc-tgd-4872-06	48" (1219mm)	72" (1829mm)	6" (152mm)
wvc-tgd-4872-10	48" (1219mm)	72" (1829mm)	10" (254mm)
wvc-tgd-4884-06	48" (1219mm)	84" (2134mm)	6" (152mm)
wvc-tgd-4884-10	48" (1219mm)	84" (2134mm)	10" (254mm)
wvc-tgd-4896-10	48" (1219mm)	96" (2438mm)	6" (152mm)
wvc-tgd-4896-06	48" (1219mm)	96" (2438mm)	6" (152mm)
wvc-tgd-4896-10	48" (1219mm)	96" (2438mm	10" (254mm)
wvc-tgd-6060-06	60" (1524mm)	60" (1524mm)	6" (152mm)
wvc-tgd-6060-10	60" (1524mm)	60" (1524mm)	10" (254mm)
wvc-tgd-7272-06	72" (1829mm)	72" (1829mm)	6" (152mm)
wvc-tgd-7272-10	72" (1829mm)	72" (1829mm)	10" (254mm)
wvc-tgd-8484-06	84" (2134mm)	84" (2134mm)	6" (152mm)
wvc-tgd-8484-10	84" (2134mm)	84" (2134mm)	10" (254mm)

When ordering, please also indicate grid density (8" or 12") and slab thickness ($\frac{3}{8}$ " [9mm] or $\frac{1}{2}$ " [12mm]). Please note that all dimensions are nominal, supplier reserves the right to adjust sizing without prior notification.



STANDARD SHAPES

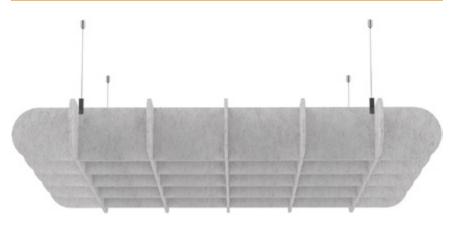

Oval Grid Canopy

PART NUMBER	LENGTH	WIDTH	HEIGHT
wvc-flb-4848-06	48" (1219mm)	48" (1219mm)	6" (152mm)
wvc-flb-4848-10	48" (1219mm)	48" (1219mm)	10" (254mm)
wvc-flb-4860-06	48" (1219mm)	60" (1524mm)	6" (152mm)
wvc-flb-4860-10	48" (1219mm)	60" (1524mm)	10" (254mm)
wvc-flb-4872-06	48" (1219mm)	72" (1829mm)	6" (152mm)
wvc-flb-4872-10	48" (1219mm)	72" (1829mm)	10" (254mm)
wvc-flb-4884-06	48" (1219mm)	84" (2134mm)	6" (152mm)
wvc-flb-4884-10	48" (1219mm)	84" (2134mm)	10" (254mm)
wvc-flb-4896-06	48" (1219mm)	96" (2438mm)	6" (152mm)
wvc-flb-4896-10	48" (1219mm)	96" (2438mm)	10" (254mm)
wvc-flb-6060-06	60" (1524mm)	60" (1524mm)	6" (152mm)
wvc-flb-6060-10	60" (1524mm)	60" (1524mm)	10" (254mm)
wvc-flb-7272-06	72" (1829mm)	72" (1829mm)	6" (152mm)
wvc-flb-7272-10	72" (1829mm)	72" (1829mm)	10" (254mm)
wvc-flb-8484-06	84" (2134mm)	84" (2134mm)	6" (152mm)
wvc-flb-8484-10	84" (2134mm)	84" (2134mm)	10" (254mm)


When ordering, please also indicate grid density (8" or 12") and slab thickness ($\frac{3}{8}$ " [9mm] or $\frac{1}{2}$ " [12mm]). Please note that all dimensions are nominal, supplier reserves the right to adjust sizing without prior notification.



COMPONENTS



Panels



RECOMMENDED HARDWARE (NOT INCLUDED)



Ezo clamp CBG-C Combo Upper Suspension Housing CF6-01





CUSTOMIZABLE PARAMETERS

Geometric Properties Length, width, grid density and slab depth

Material Thickness ³⁄₈" (9mm) or ¹⁄₂" (12mm)

Color

Each panel can be manufactured with different color

Digital Print

Custom graphics and textures can be printed on panels

Scalability

Larger spans can be achieved with invisible joints





SPECIFICATIONS

End Style

Slabs can tapered or oval.

Sizes

Available in four lengths:

- 48" (1219mm)
- 60" (1524mm)
- 72" (1829mm)
- 84" (2134mm)
- Available in five widths:
- 48" (1219mm)
- 60" (1524mm)
- · 72" (1829mm)
- 84" (2134mm)
- 96" (2438mm)

Available in two heights:

- 6" (152mm)
- 10" (254mm)

Thickness

Available in two thicknesses:

- ¾" (9mm) | ±0.5mm
- 1/2" (12mm) | ±0.5mm

Composition

100% PET (min. %50 recycled content)

Product Variances

Variation in fiber mix and colour may occur. All products will be supplied within commercial tolerances.

Cleaning

Remove dust & dirt with a stiff plastic bristle brush. Distilled water can be used to remove stains. Use a soft, clean cloth & blot dry. Vacuuming works great as well.

Fire Testing

North America:

- ASTM E-84 Class A*
- CAN ULC S102-10
- Europe and UK:
 - EN13501-1: 2007

Installation

Shipped flat and easily assembled on site. Grid Canopies can be suspended from open deck ceilings or from standard T bar ceilings with optional adjustable hardware.

Acoustics

Refer to ASTM C423 test chart for specific absorption rates/frequency.

- ¾" (9mm): NRC 0.75 (subject to mounting conditions and geometrical properties)
- ½" (12mm): NRC 0.85 (subject to mounting conditions and geometrical properties)

USGBC LEED v4 Credits

While individual products do not 'earn' LEED credits, ezoBord can contribute to the following LEED v4 Credits. Please refer to the USGBC LEED credit guides for detailed requirements.

- EQc9 for enhancing acoustic performance
- MRc3 BPDO for sourcing of raw materials for recycled contribution
- EQc6 interior lighting for surface reflectance (lighter color options).

Environment

Made of polyester fiber, min. 50% of which comes from recycled water bottles which contributes to LEED MR Credit and BREEAM Health and Wellbeing, Materials points due to recycled content, acoustic performance, and low emitting materials. No VOC's: CDPH v1.2 and REACH SVHC Compliant.



* Upon request, 1/2"(12mm) sheet material is treated with USA origin post-production flame retardant to Class A surface burning characteristics. Post sheet production FR treatment does not contain any Red List Restricted Chemicals and complies with California Proposition 65. Contact customer service for technical information, test data and safety data sheets for flame retardant.



NOISE REDUCTION - 1/2" (12mm)

Constructed from

1/2" (12mm) ezoBord

End Style

Tapered

Grid Density


12½" (317.5mm)

Grid Height

10" (254mm)

SOUND ABSORPTION COEFFICIENTS (ASTM C423-17)

NRC	SAA	125	250	500	1000	2000	4000
0.85	0.84	0.17	0.51	0.70	0.92	1.22	1.36



FREQUENCY (Hz)

NOISE REDUCTION - 3/8" (9mm)

Constructed from


3/8" (9mm) ezoBord

End Style Tapered

Grid Density 10¾" (263.52mm)

Grid Height

6" (152.4mm)



REQUENCY (Hz)



STANDARD COLORS - 3/8" (9mm)

PB09	CG06	ES07	DG34	SG04
PURE BLACK	CHARCOAL GRAY	EBONY SLATE	DARK GRAY	SILVER GRAY
CW04	LB01	DS10	SD18	TO24
CLASSIC WHITE	LIGHT BEIGE	DESERT SAND	SUNNY DAYS	TIGER ORANGE
RR28	DP30	MN12	PI14	GA41
RUBY RED	DEEP PURPLE	MIDNIGHT NAVY	POLAR ICE	GREEN APPLE

STANDARD COLORS - 1/2" (12mm)

PB09	CG06	BC07	EG11	SG04
PURE BLACK	CHARCOAL GRAY	BOLD GRAY	ELEPHANT GRAY	SILVER GRAY
CW04	DS10	TB35	SD18	BR34
CLASSIC WHITE	DESERT SAND	TREE BARK	SUNNY DAYS	BRICK RED
GV36	RB08	PI14	OB14	MG10
GRAPE VINE	ROYAL BLUE	POLAR ICE	OCEAN BLUE	MOSS GREEN





CONNECT WITH US

www.ezoBord.com

@ @ezobord

- 🥑 @ezobord
- in linkedin.com/company/ezobord

ezoBord is a registered trademark of iVekter Inc.

USA

Ayrsonics Midwest LLC 170 Prairie Lake Rd East Dundee, IL 60118 1-800-517-0686 sales@mw.ayrsonics.com

CANADA

Ayrsonics Inc. 825 Trillium Drive Kitchener ON N2R 1J9 1-844-441-1122 sales@ayrsonics.com

UNITED KINGDOM

ezoBord UK LTD Unit 20 Westwood Business Park Margate, Kent, CT9 4JJ +44 7981 111236 sales@ezobord.co.uk

294 Kifisias Av., 15232 Chalandri-Greece - T 2106844905- E. info@asset.gr - asset.gr