Let's Think Open Booth

asset becomes place

Forma 5

TECHNICAL FEATURES LET'S THINK




CONCENTRATION CUBICLE




CONCENTRATION CUBICLE - SINGLE LET'S THINK



CONCENTRATION CUBICLE - RELAX LET'S THINK

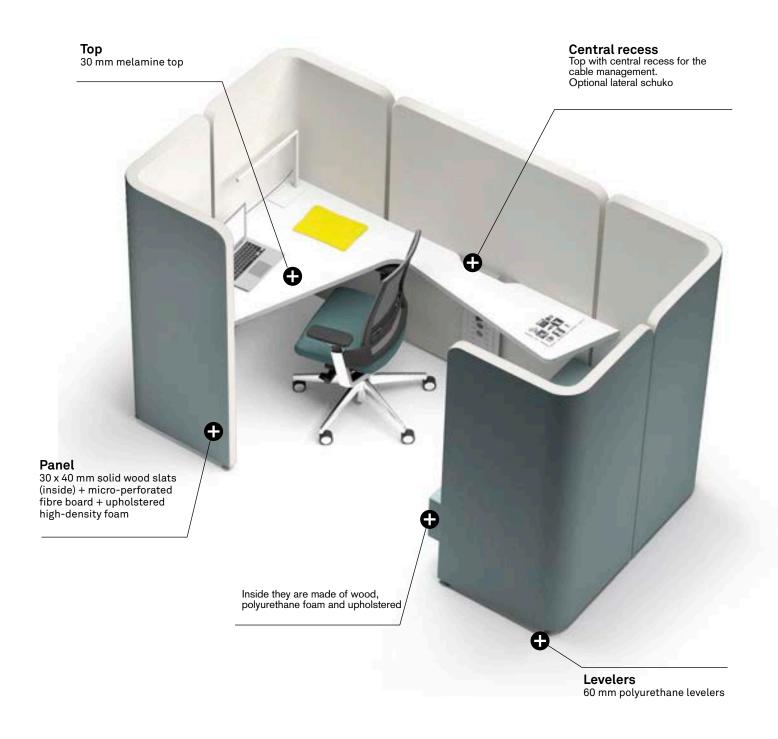

CONCENTRATION CUBICLE - VISITOR LET'S THINK

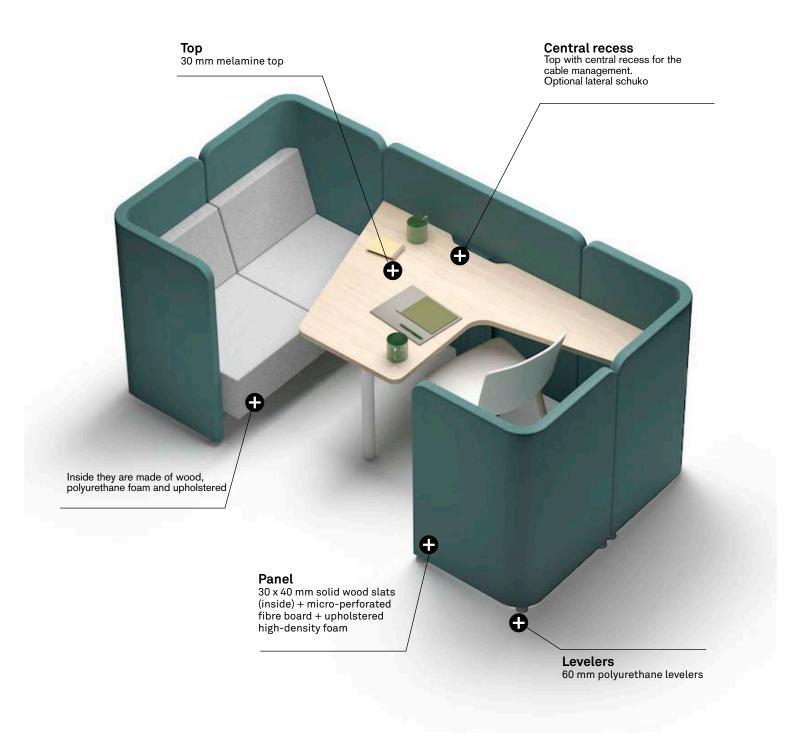


SINGLE SOFA - OVAL LET'S THINK



Levelers 60 mm polyurethane levelers

ELEMENT DESCRIPTION

BOARD



TOPS

MELAMINE: 30 mm thick melamine particle board. 2 mm thick thermofused edges.

Mechanized in the low part for its correct assembly. The quality requirements for the board are made according to the UNE-EN312 legal terms, corresponding to P2 board. The average density for 30 mm thick boards is 610 kg/m³. The structural design can generate 2 mm/ml of maximum clearance for desk tops, without affecting this aspect to the functionality.



THE FIXING OF THE TABLE TO THE PANEL

Let's booths can have a specific meeting table within them. These are quickly attached in just one click; no effort at all.





PANELS

Its reticular structure composed by a combination of fiberboard strips, $30 \times 40 \text{ mm}$ solid wood both, in option. Two microperforated fiberboard cover the structure increasing the resistance and the acoustic absorption. This structural block is covered with 60kg/m^3 high density foam, and it could be upholstered later with our range of finished.


They are supported by polypropylene levelers with 60 mm diameter. The panels join among by tongued and grooved fixation system without tools, made of polyamide with fibreglass.

The set composed by straight and curved panels create a reconfigurable and versatile system that allows to offer a wide range of configurations and high flexibilty for redirect work spaces.



TECHNICAL ACOUSTIC SPECIFICATION OF THE PANELS LETS

A coating of polyurethane foam 60 Kg/m3 density Micro-perforated particle melamine board with 3 mm thickness Polyurethane foam padding with 20 Kg/m³ density MDF supporting structure of 30 mm tichness

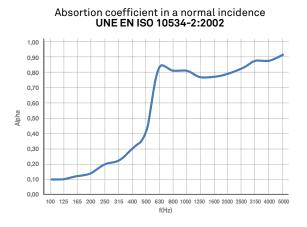

CABLE MANAGEMENT

Lets offers two solutions of vertical conduction thanks to the panel systems. Both are made of steel sheets with 1,5 mm thickness and they are covered by lids with 1,2 mm thickness that are submited to a lacquering process later with epoxy paint of 100 microns thickness. The basic option offers us the possibility of leading the cabling systems up to meeting desk or work desk, staying always below the level of these surfaces. The widespread version, it rises on the work level and has a VESA 25/200 screen support. The lids are easily detachable and allow the quick reconfiguration of of the installations.

All the desk tops allow a reduction in the central zone, the nearest to the panel, for the conduction cable towards the low part of the set.









SHELVES

This serie has, as a complement, with a shelf program, supported by these panels without the use of tools. They are made of calibrated rods of 11mm diameter and covered with epoxy paint and kompress board shelves with 13 mm thickness.







SIMPLE CONCENTRATION CUBICLE

B:132 66	CONCENTRATION CUBLICLE WITH HIGH h:100 OR LOW TOP h:74,5	АхВ	73 x 132
A: 172 66 40 66 B:132 66 66 40	CONCENTRATION CUBLICLE WITH HIGH h:100 OR LOW TOP h:74,5	АхВ	172 x 132
B:132 66 60 A:126	CONCENTRATION CUBLICLE SINGLE LET'S THINK	АхВ	126 x 132
A:252 120 B 66 cm backrest h: 81 cm seat h: 45 cm	CONCENTRATION CUBLICLE RELAX LET'S THINK	AxB	252 x 132
A:252 B 66 backrest h: 81 cm seat h: 45 cm	CONCENTRATION CUBLICLE VISITOR LET'S THINK	АхВ	252 x 132

PANEL h:110/150

OVAL CONCENTRATION COBICLE

A B	SINGLE SOFA WITH PANEL OVAL LET'S THINK	A x B	91,2 x 67,5
-----	--	-------	-------------

h panel: 131 cm h backrest: 76 cm h seat:46 cm h writing pad: 70,8


CONFIGURATIONS AND DIMENSIONS

DOUBLE CONCENTRATION CUBICLE

A: 172 66 40 66 132 66 73	CONCENTRATION CUBLICLE WITH HIGH h:100 OR LOW TOP h:74,5	АхВ	172 x 132
A: 132 66 66 66 66 66 66	CONCENTRATION CUBLICLE WITH HIGH h:100 OR LOW TOP h:74,5	АхВ	132 x 73
A:132 66 66 66 66 40	CONCENTRATION CUBLICLE WITH HIGH h:100 OR LOW TOP h:74,5	АхВ	132 x 106

PANEL h:110/150

TOP FOR SINGLE OR DOUBLE CONCENTRATION CUBLICLE

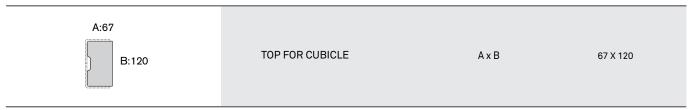

MELAMINE TOP h:74,5 / 100 KOMPRESS TOP h: 72,8 / 98,3

TOP FOR CONCENTRATION CUBICLE: SINGLE - RELAX - VISITOR LET'S THINK

A B	TOP FOR CONCENTRATION CUBLICLE SINGLE LET'S THINK	АхВ	120 x 120
В	TOP FOR CONCENTRATION CUBLICLE RELAX LET'S THINK	АхВ	195 x 120
A B	TOP FOR CONCENTRATION CUBLICLE VISITOR LET'S THINK	АхВ	180 x 120

MELAMINE TOP h:74,5

CONFIGURATIONS AND DIMENSIONS

SHELVES

h B A	SHELF WITH 4 SHELVES	AxBxh	100 x 29,15 x 143'65
h A A	SHELF WITH 2 SHELVES	AxBxh	100 x 29,15 x 73,7
B A	CORNER SHELF	AxBxh	46,37 x 46,37 x 53,7

13 mm BOARD

ELECTRIFICATION COLUMN

h B	ELECTRIFICATION COLUMN WITH DESK HEIGHT	AxBxh	22,2 x 4,2 x 68
h A	ELECTRIFICATION COLUMN AND TV SUPPORT	AxBxh	22,2 x 4,2 x 140



Life Cycle Analysis **LET'S THINK Program**



MATERIAS PRIMAS			
Materia Prima	Kg	%	
Wood	24,3Kg	85,2%	
Plastic	0,16 Kg	0,6%	
Upholstered/ Filling material	3,97 Kg	14,1%	

% Recycled material= 73%

% Recyclable materials = 85,8%

Ecodesign

Results reached during the life cycle stages



MATERIALS

 \mbox{Wood} 70% of the wood material is recycled, has PEFC/FSC and complies within the E1 standard.

Steel 15%-99% recycled material.

Upholstered / Filling materialFilling without HCFC and upholsteries without COVs emisions. Accredited by Okotext.

30%-40% recycled material.

Paintings

Podwer painting without COV emissions

Packings 100% recyclable with inks with no solvents.

PRODUCT ENVIRONMENTAL STATEMENT





PRODUCTION

Raw materials use optimization Board, upholstery and steel tubes cut.

Renewable energies use reducing the CO2 emissions. (Photovoltaic pannels)

Energy saving measures in all production process

COV global emission reduction of the production processes by 70%.



Cardboard use opmitization of the packings

Cardboard and packing materials use reduction

Flat packings and small bulks to optimize the space.

Solid waste compacter which reduces transport and emissions.

Light volumes and weights

Transport fleet renewal reducing by 28% the fuel consumption.

Podwer painting ecovery of 93% of the non deposited painting

Glue removal from the upholstery

have an internal sewage for liquid waste.

100% waste recycling at production process ans dangerous waste special treatment.

The facilities

Green points

at the factory

Suppliers area reduction Local market power and less pollution at transport.



Easy maintenance and cleaning without solvents.

Forma 5 guarantee

The highest quality for materials to provide a 10 year average life of the product.

Useful life optimization of the product due to a standarized and modular design.

The boards with no E1 particle emission.



Easy unpacking for the recyclability or compound reuse.

Piece standarization for the use.

Recycled materials used for products (% recyclability):
Wood is 100% recyclable.
Steel is 100% recyclable.
Aluminium is 100% recycable.
Plastics are from 70 to 100% recyclable.

With no air or water pollution while removing waste.

Returnable, recyclable and reusable packing

Product recyclability 85,8%

MAINTENANCE AND CLEANING GUIDE

METAL PIECES
1 Rub the dirty spots with a wet cloth with PH neutral soap.
Polished aluminium pieces can have their polish bak by covering and rubbing them with a dry cottom cloth.
GLASS PIECES
Rub the dirty spots with a wet cloth with PH neutral soap.
Do not use abrasive products in any case.

LEGAL TERMS

CERTIFICATES

Forma 5 certifies that Let's program has passed all tests provided by AENOR INTERNATIONAL:

UNE-EN-ISO 14006:2011 : management system certificate of Ecodesign

Developed by GABRIEL TEIXIDÓ