

Rail
Soundabsorbing Lighting

asset
space becomes place



RAIL

ezo
BOARD



MEET RAIL



Cross Configuration: Rythm and sequence



With Rail we are going beyond illumination for interior spaces. True to our acoustic roots, we incorporate the performance of EzoBord material to LED technology providing a synergistic relation between acoustics and lighting as a solution to high-end noise levels, reverberation and poor lighting issues common to open spaces.

Designed in collaboration with Metalumen, Rail comes with a variety of light color temperatures and as a mix with our classic Baffle Systems (“Vesi” and “Veldi”).

RAIL ACOUSTIC Baffles

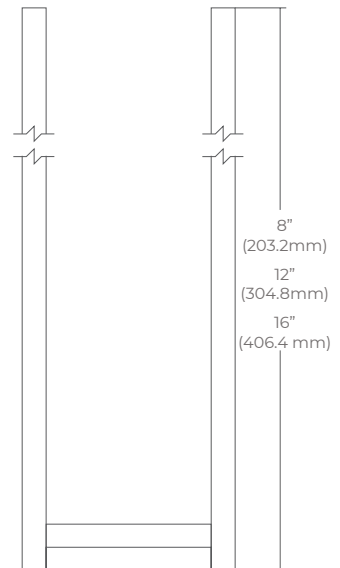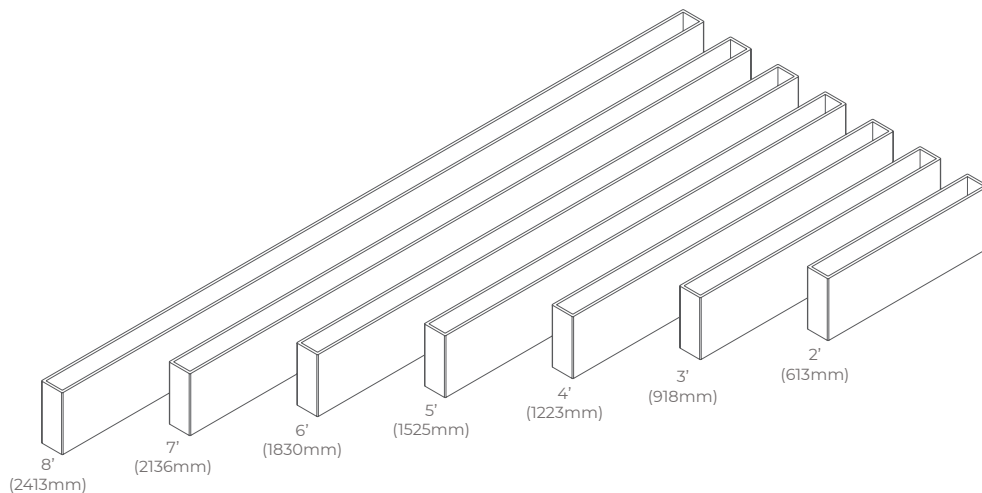

LENGTHS

2' (609.6 mm)
3' (914.4 mm)
4' (1219.2 mm)
5' (1524 mm)

6' (1828.8 mm)
7' (2133.6 mm)
8' (2438.4 mm)

HEIGHTS

8" (203.2mm)
12" (304.8mm)
16" (406.4mm)

THICKNESS 3/8" (9mm) or 1/2" (12mm) | ±0.5mm

WEIGHT 3/8" (9mm) sheet: 8.4lbs (3.8kg) | ±5%
1/2" (12mm) sheet: 16.0lbs (7.26kg) | ±5%

HARDNESS 60-65 (Shore C)

COMPOSITION

100% PET (min. %50 recycled content)

PRODUCT VARIANCES

Variation in fiber mix and colour may occur. All products will be supplied within commercial tolerances.

FIRE TESTING

NORTH AMERICA:

- ASTM E-84 Class A*
- CAN ULC S102-10

EUROPE AND UK:

- EN13501-1: 2007

ACOUSTICS

Refer to ASTM C423 test chart for specific absorption rates/frequency.

- 3/8" (9mm): NRC 0.75 (subject to mounting conditions and geometrical properties)
 - 1/2" (12mm): NRC 0.85 (subject to mounting conditions and geometrical properties)
- (subject to mounting conditions and geometrical properties)*

ENVIRONMENT

Made of polyester fiber, min. 50% of which comes from recycled water bottles which contributes to LEED MR Credit and BREEAM Health and Wellbeing, Materials points due to recycled content, acoustic performance, and low emitting materials. No VOC's: CDPH v1.2 and REACH SVHC Compliant.



PRODUCT VARIANCES

Variation in fiber mix and color may occur. All products will be supplied within commercial tolerances.

GENERAL

Tackable, impact resistant, bacteria resistant, moisture resistant, installation friendly.

RAIL LED LIGHTS

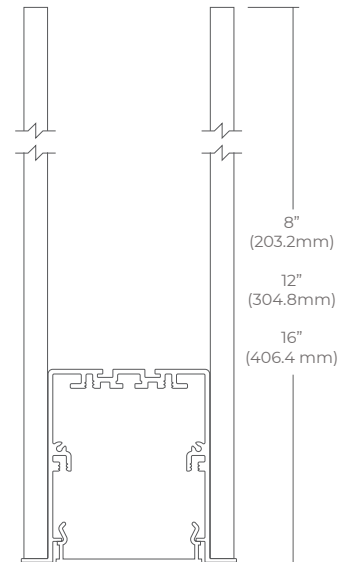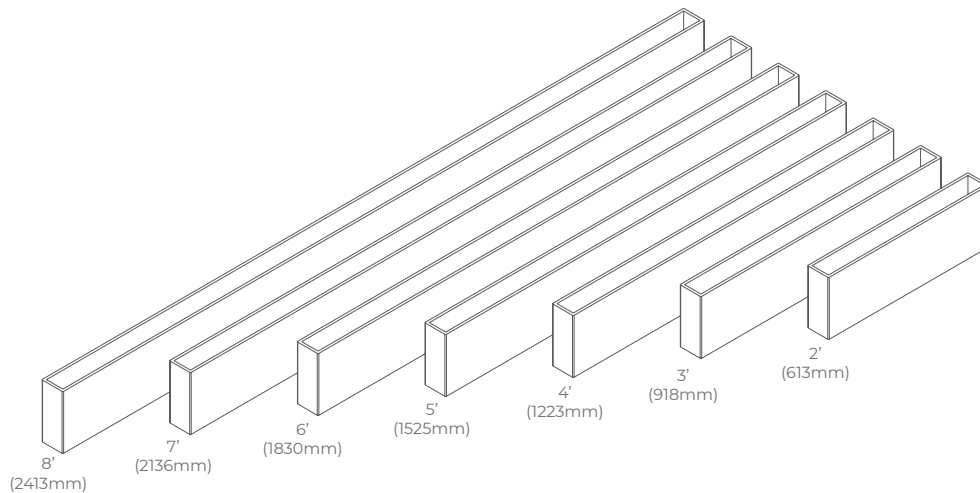

LENGTHS

2' (609.6 mm)
3' (914.4 mm)
4' (1219.2 mm)
5' (1524 mm)

HEIGHTS

6' (1828.8 mm)
7' (2133.6 mm)
8' (2438.4 mm)
16" (406.4mm)

THICKNESS

Aluminum end caps.OPTICAL SYSTEM

Metalumen luminaires are designed to utilize leading edge LED technology combined with luminaire optimized reflectors and our custom diffusers, resulting in industry leading optical performance.

WEIGHT

0.95 kg/300mm [2.1 lb/ft]

HOUSING

Rigid extruded aluminum body, 2.0mm (0.08") nominal wall

CRI

83+ for 3500K, 80 minimum for all CCTs in standard configurations.

LUMEN MAINTENANCE

Minimum 50,000h with TM-21 lumen maintenance of 85% @ 25°C ambient temperature (calculated based on IESNA LM-80-08 LED test data). L70: ≥60,000hrs.

PAINT FINISHES

Satin aluminum, white and black are standard finishes. For custom finish, contact factory.

MOUNTING

Aircraft cable yoke complete with a Quick-Grip field adjustable suspension system. Threaded rod for t-bar and unistrut metal framing system.

ELECTRICAL

Factory prewired with easy wire quick connect sections.

DRIVERS

Metalumen offers 0-10V dimming* as a standard on our entire LED product offering. Dimming range is 1%-100%. Power factor is > 90%. Class 2 rating. Drivers are integral.

APPROVALS

All components are UL/ CSA/QPS recognized or listed. RoHS compliant. This product is cULus listed.

ENVIRONMENT

Suitable for dry or damp locations.

*Standard drivers compatible with passive/ sinking dimmers. Please contact Metalumen if active/sourcing dimmer support is required.


NOISE REDUCTION - 3/8" (9MM)

Baffles for LED lighting
 3/8" (9mm) material
Model: LIT
 (6 objects, 12 in. apart)

SABINS:
 Per Lineal Metre: 4.35
 Per Lineal Foot: 1.33

SOUND ABSORPTION COEFFICIENTS (ASTM C423-17)

NRC	125	250	500	1000	2000	4000
1.10	0.2	0.39	0.64	0.92	1.17	1.29

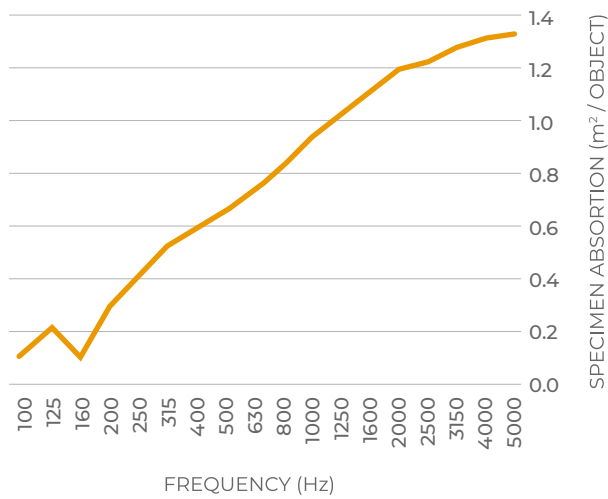


NOISE REDUCTION - 1/2" (12MM)

Baffles for LED lighting
 1/2" (12mm) material
Model: UN-LIT
 (6 objects, 12 in. apart)

SABINS:
 Per Lineal Metre: 4.35
 Per Lineal Foot: 1.33

SOUND ABSORPTION COEFFICIENTS (ASTM C423-17)

NRC	125	250	500	1000	2000	4000
1.20	0.13	0.43	0.66	1.06	1.31	1.4

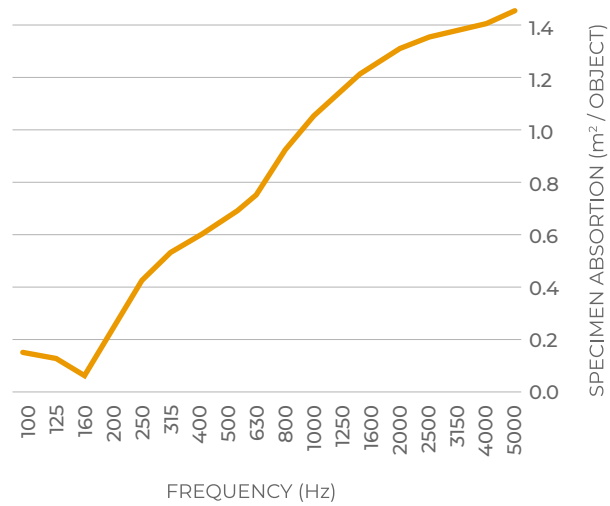

LIGHT DATA

COLOR TEMPERATURES



3000K



3500K




4000K


LIGHT LEVEL PERFORMANCE

3500K, 80 CRI, 0-10V Dimming (Standard)
 per 60000 HOURS of use


Light Level	Lumens per foot	Wattage per foot	Efficacy (lm/W)
L1	500	5.0	99
L2	750	7.6	99
L3	1000	10.1	99

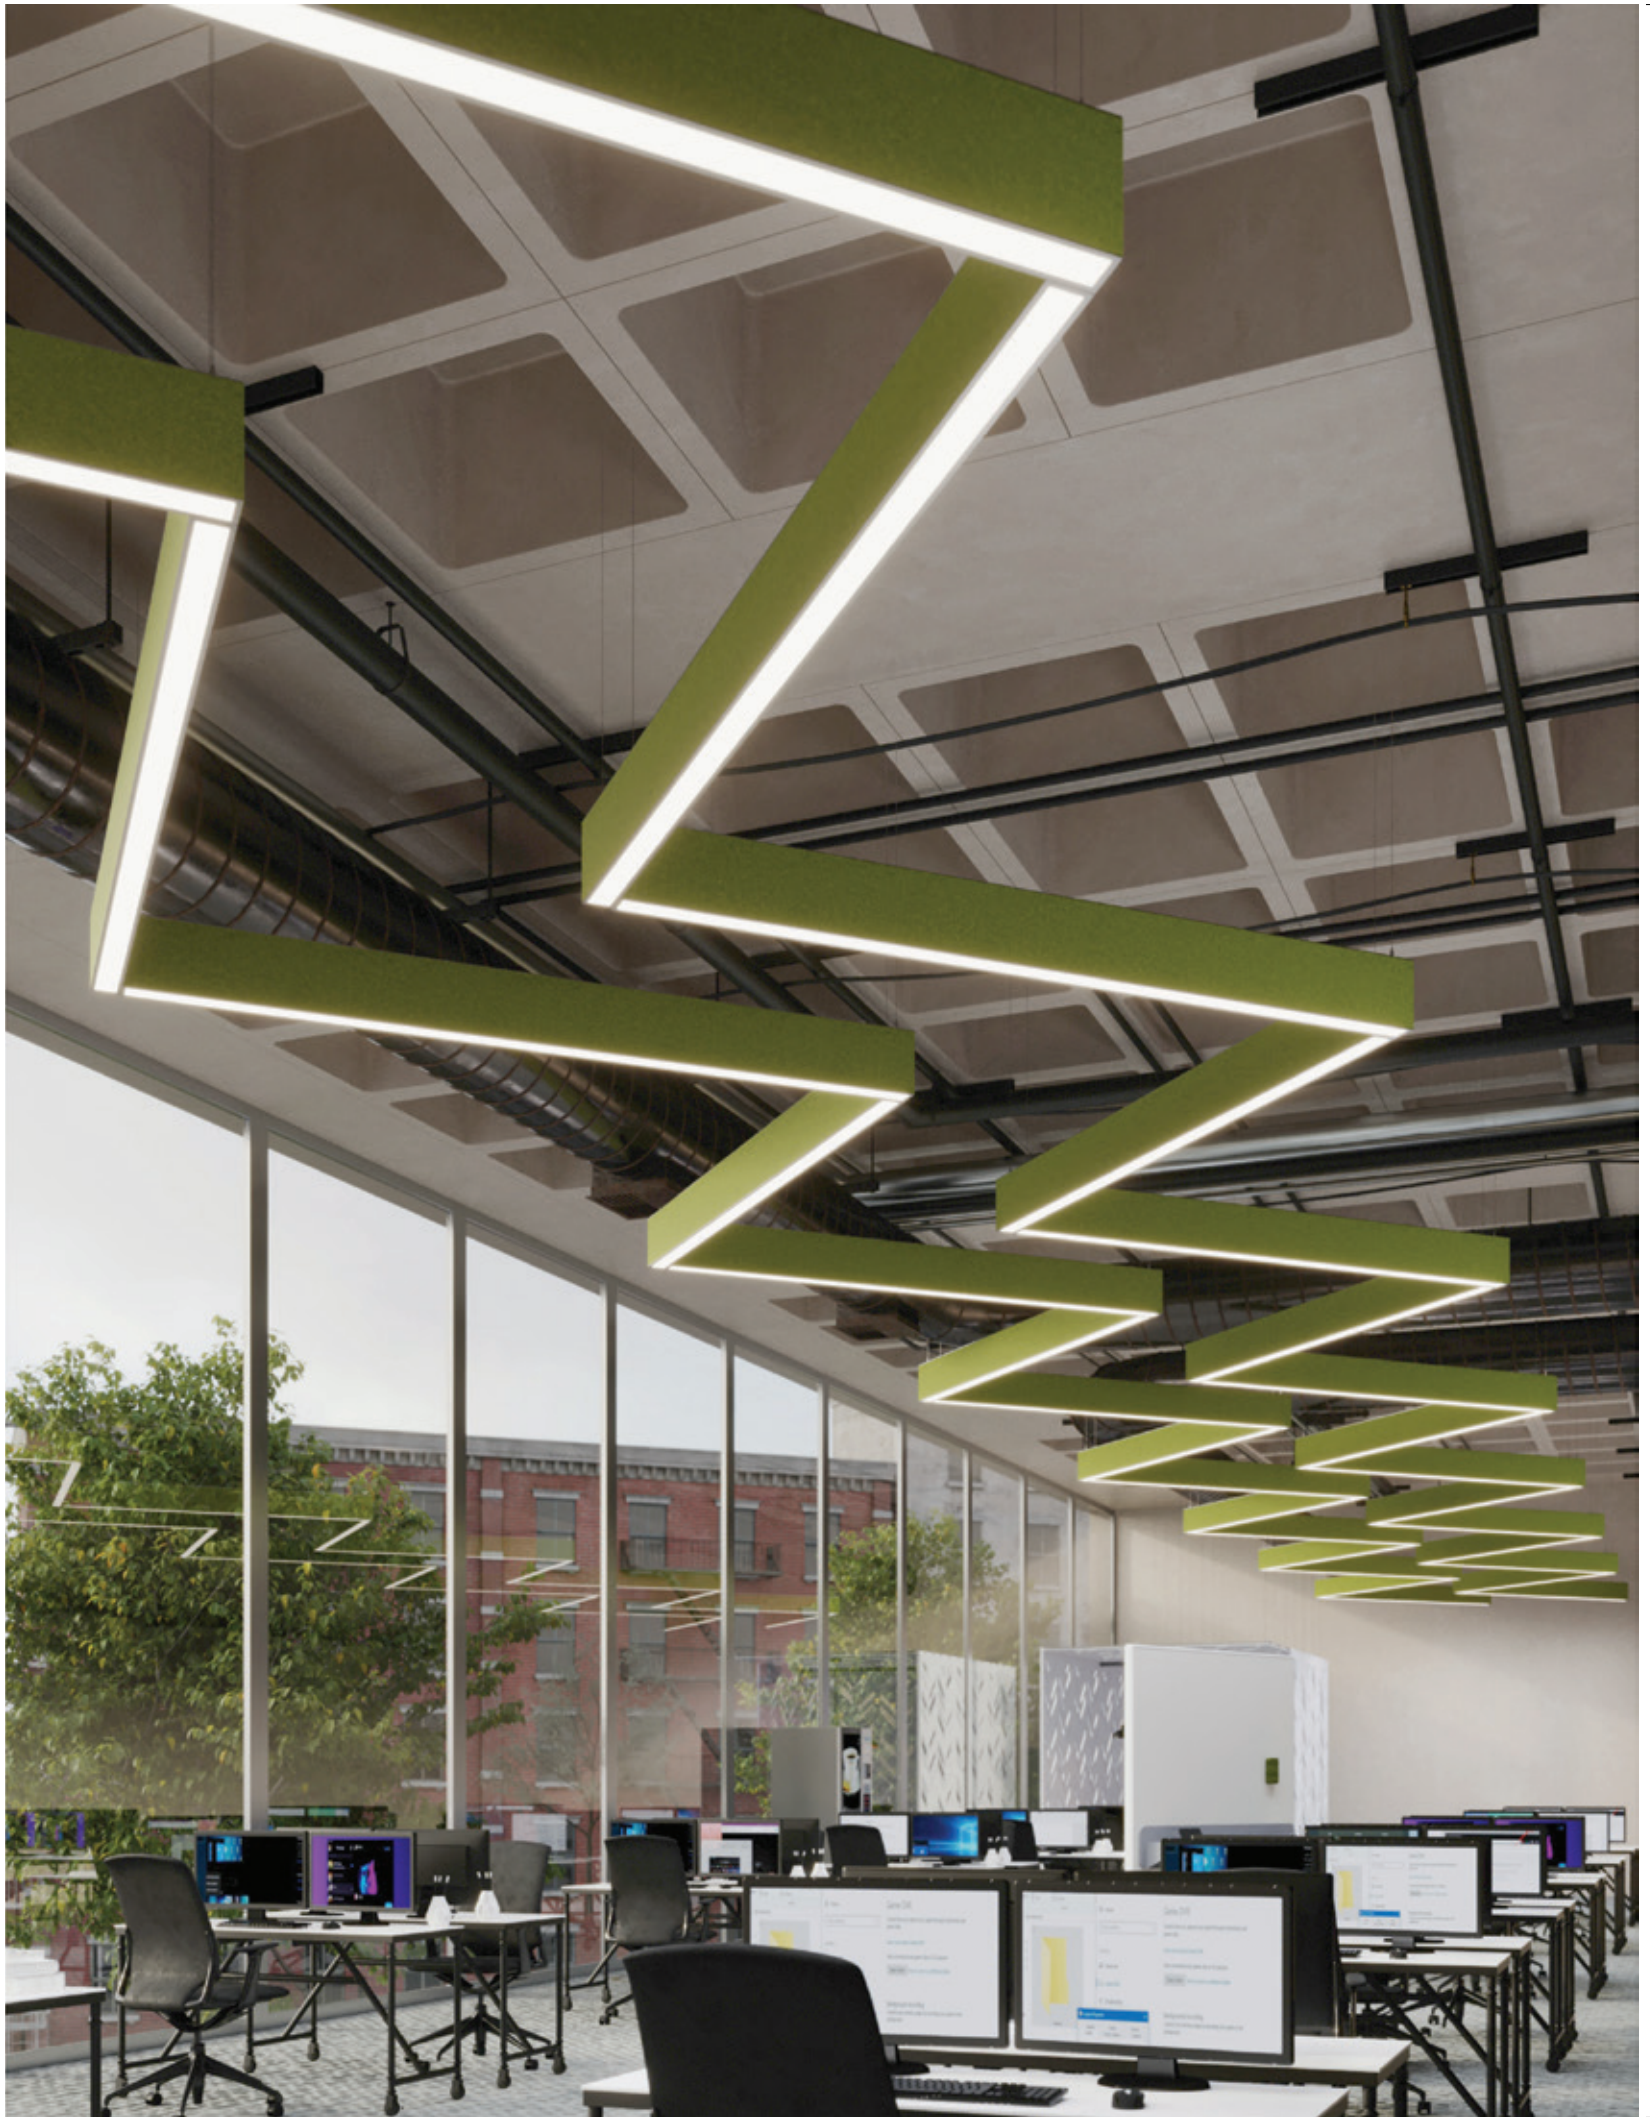


CONFIGURATION OPTIONS

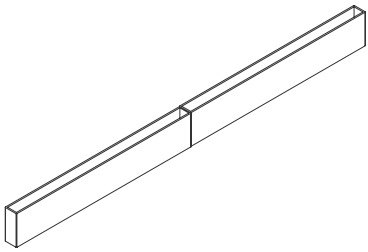


ALIGNED




CORNER




T-SHAPE



CROSS



SQUARE

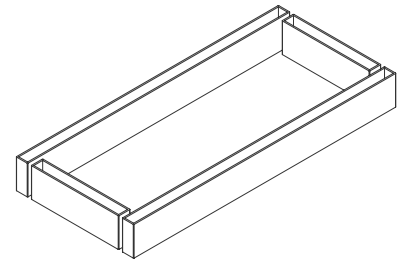


RECTANGULAR






Grid Configuration: illumination and sound absorption at its best


RAIL+RAIL CONFIGURATION

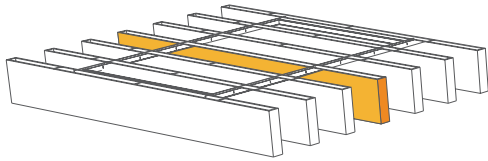

MODULE

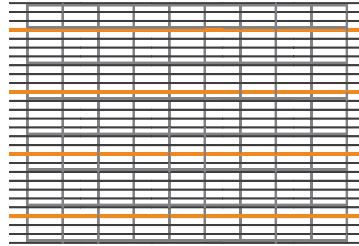

FULL CEILING

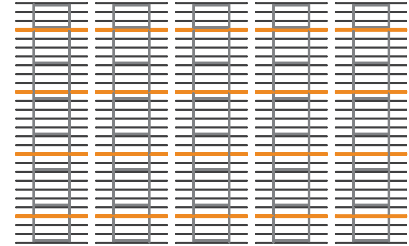


ROWS




RAIL+ RAIL: acoustic and light performance design.


RAIL+VESI CONFIGURATION

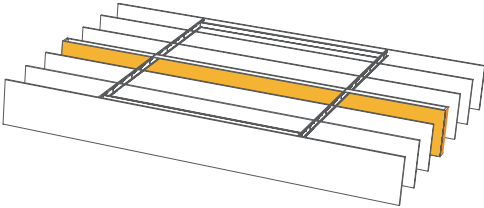

MODULE

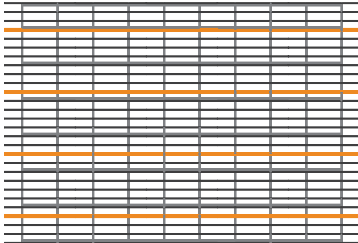

FULL CEILING

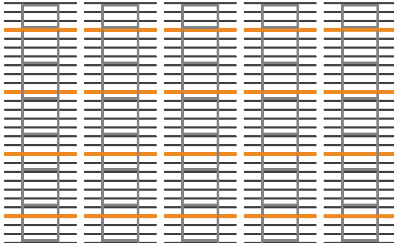


ROWS




RAIL+ VESI: changing the game


RAIL + VELDI CONFIGURATION

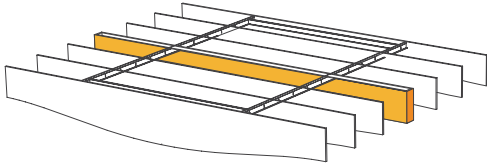

MODULE

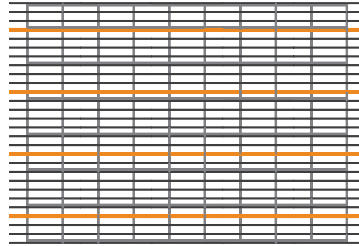

FULL CEILING

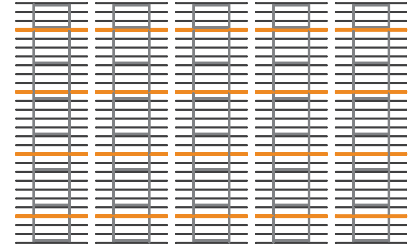

ROWS



RAIL+ VELDI: perfect together to make an statement



Rail makes beautiful any space.



MIX & MATCH YOUR COLORS


PRINT WOOD FINISH & *BASE MATERIAL




DARK OAK
W-DO-07
CG06



GREY OAK
W-GO-08
SG04




WENGE
W-WE-02
CG06




APPLE
W-AP-05
CG06



CHERRY MATE
W-CM-03
DS10



WALNUT
W-WA-01
DG34



ASH
W-AS-06
DS10



YELLOW OAK
W-YO-09
DS10



MARMAR MAPLE
W-MM-04
DS10



BIRCH SAND
W-BS-10
DS10

COLOR & FINISHES

COLORS 3/8" (9MM)



PURE BLACK
PB09



CHARCOAL GRAY
CG06



EBONY SLATE
ES07




DARK GRAY
DG34




SILVER GRAY
SG04



CLASSIC WHITE
CW04



LIGHT BEIGE
LB01



DESERT SAND
DS10



SUNNY DAYS
SD18



TIGER ORANGE
TO24




RUBY RED
RR28



DEEP PURPLE
DP30



MIDNIGHT NAVY
MN12



POLAR ICE
PI14



GREEN APPLE
GA41


COLORS 1/2" (12MM)




PURE BLACK
PB09



CHARCOAL GRAY
CG06



BOLD GRAY
BG07



ELEPHANT GRAY
EG11




SILVER GRAY
SG04



CLASSIC WHITE
CW04



DESERT SAND
DS10



TREE BARK
TB35



SUNNY DAYS
SD18




BRICK RED
BR34



GRAPE VINE
GV36



ROYAL BLUE
RB08



POLAR ICE
PI14



OCEAN BLUE
OB14



MOSS GREEN
MG10





ENVIRONMENT

Our Commitment to the Environment

There are approximately 50 billion water bottles consumed around the world each year, and only about half of those get recycled. The rest end up in landfills, littered through our neighborhoods, or floating in our oceans.

Bottled water consumption has more than doubled since 2000; in 2015 there was the equivalent of more than 5 bottles of water consumed for every person in the USA every single week. This, of course, means that the amount of oil required to produce the energy used for the water bottling process continues to grow.

In 2007, the last year global statistics of oil consumption were available, between 32 million and 54 million barrels of oil were used to produce the bottled water that was consumed in the USA alone. This energy is used to make the bottles from PET pellets (1 million tons in the USA), treat water, bottle the water, label the bottles, and transport the bottled water. Most of the energy consumption occurs in the creation of the bottles themselves. To help in the lifecycle of this plastic product, we have chosen to manufacture our material so that it recycles these PET bottles. We are doing our part to reduce the waste. This acoustical and tackable material is made from PET bottles in a zero-waste process with postindustrial recycling. An environmentally friendly, sustainable, and waste reduced alternative to traditional acoustical/tackable material that looks great in any office, education, or open space installation.

EzoBord is




- low VOC
- formaldehyde free

DID YOU KNOW...



For every pound of recycled PET bottles (approximately 23) energy use is reduced by 84% and greenhouse gas emissions are reduced by 71%.

PET BOTTLES

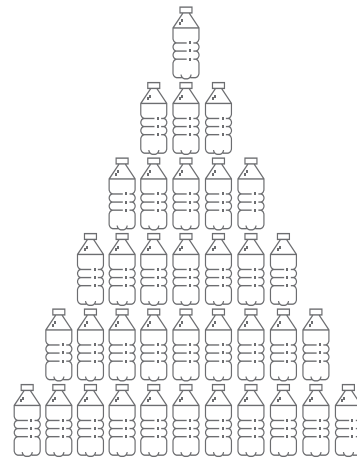

± 166 pet bottles are used to make one $\frac{3}{8}$ " 9mm thick EzoBord sheet.

± 318 pet bottles are used to make one $\frac{1}{2}$ " 12mm thick EzoBord sheet.





CANADA

Ayrsonics Inc - Ontario

825 Trillium Drive
Kitchener, Ontario N2R 1J9
P: 1-844-441-1122
sales@ayrsonics.com

Ayrsonics Inc - Alberta

#9112 – 52nd St. S.E.
Calgary, Alberta T2C 5A9
P: 1-844-441-1122
sales@ayrsonics.com

UNITED STATES

Ayrsonics

Mid West LLC

170 Prairie Lake Rd
East Dundee, IL 60118
P: 1-800-517-0686
sales@mw.ayrsonics.com

New England

32 Hampshire Rd
Salem, NH 03079
P: 603-824-9338 ext. 3001
P: 603-327-4349
sales@ne.ayrsonics.com

Southwest

1700 1st Street
San Fernando, CA 91340
P: 213-833-9700
sales@sw.ayrsonics.com

EzoBord Head Office

6845 Rexwood Road, Unit 7 Mississauga
ON, L4V 1S5 CANADA
FAX +1 416 665 3571
info@ezobord.com

FOLLOW US



ezobord.com

