

BuzziBalance
Soft Seating

asset
space becomes place

BuzziBalance

Product Specification Sheet

This document contains technical information about the BuzziBalance



www.buzzi.space



Move your body, move your mind

BuzziBalance creates a non-traditional environment that brings people together, provoking joy and conversation. The BuzziBalance family offers both a seating and standing element. While standing, BuzziBalance Board becomes a muscle activator. As one balances on the wooden-carved rocking board for a few moments, the mind and body are awakened. While sitting on the BuzziBalance, a rocking pouf in small and large version, the benefits of purposeful stretching are brought into the workplace. The upholstered seat also offers added acoustical benefits. The perfect solution for creative hubs in offices, hospitality or residential homes. BuzziBalance offers the best of both worlds. Stretch your legs for a quick phone call or gather and rock away during a creative session.

Design by 13&9 Design

General

- 🔑 BuzziBalance Small | BuzziBalance Small High | BuzziBalance Large
BuzziBalance Board Small | BuzziBalance Board Large
- 🌲 Filling: Acoustic foam + Plywood/MDF/Pinewood
Bottom: Solid Wood Ash
- ⋯ Cover: Fabric, Trevira CS+ | CS, Revive 1, Clara 2, Remix 3, Velvet, Hero 2, Tonus 4, Memory 2

Acoustics



Diffusion



Absorption



Low tones



Mid tones




High tones

Content

| | |
|----------------|----|
| Configurations | 3 |
| Fabrics | 5 |
| Dimensions | 8 |
| Acoustics | 10 |


Configurations

BuzziBalance Small




- 🌲 Filling: Acoustic foam + Plywood/MDF/Pinewood
Bottom: Solid Wood Ash
- ✂️ Ø 56 cm, H 38 cm
Ø 22.05", H 14.96"
- ⚖️ 13,3 kg
29.32 lbs
- ... Cover: Fabric, Trevira CS+ |CS, Revive 1, Clara 2, Remix 3, Velvet, Hero 2, Tonus 4, Memory 2

BuzziBalance Small High

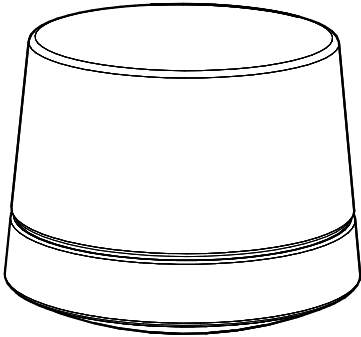


- 🌲 Filling: Acoustic foam + Plywood + Cardboard
Bottom: Solid Wood Ash
- ✂️ Ø 56 cm, H 46,5 cm
Ø 22.05", H 18.31"
- ⚖️ 13,8 kg
30.42 lbs
- ... Cover: Fabric, Trevira CS+ |CS, Revive 1, Clara 2, Remix 3, Velvet, Hero 2, Tonus 4, Memory 2

BuzziBalance Large

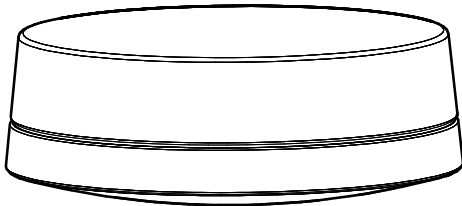


- 🌲 Filling: Acoustic foam + Plywood/MDF/Pinewood
Bottom: Solid Wood Ash
- ✂️ Ø 98 cm, H 38 cm
Ø 38.58", H 14.96"
- ⚖️ 39,5 kg
87.08 lbs
- ... Cover: Fabric, Trevira CS+ |CS, Revive 1, Clara 2, Remix 3, Velvet, Hero 2, Tonus 4, Memory 2

BuzziBalance Board Small



- 🌲 Bottom: Solid Wood Ash
- ✂ Ø 55 cm, H 7 cm
Ø 21.65", H 2.76"
- ⚖ 6,2 kg
13.67 lbs


BuzziBalance Board Large



- 🌲 Bottom: Solid Wood Ash
- ✂ Ø 97 cm, H 7 cm
Ø 38.19", H 2.76"
- ⚖ 19 kg
41.89 lbs

Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS+ | CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1 (25 colors)



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945




kvadrat

Velvet (12 colors)



Category B
Composition 100% PES
Weight 375 g/m² | 11.06 oz/yd²
Abrasion resistance > 100.000 Martindale
Fastness to light EU: 4-5
Fastness to rubbing EU: Wet 4 | Dry 4-5
Pilling EU: 4-5

Clara 2 (24 colors)



Category B
Composition 92% new wool, 8% nylon
Weight 400 g/lin.m
Abrasion resistance 80.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4
Pilling Note 4, EN ISO 12945



kvadrat

Remix 3 (73 colors)




Category B
Composition 90% new wool, 10% nylon
Weight 415 g/lin.m
Abrasion resistance 100.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4
Pilling Note 4, EN ISO 12945



kvadrat

Hero 2 (33 colors)



Category C
Composition 97% new wool, 3% nylon
Weight 580 g/lin.m
Abrasion resistance 45.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)
Fastness to light Note 5-6, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 3-4, EN ISO 12945



kvadrat

Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Memory 2 (20 colors)

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5


Pilling Note 4, EN ISO 12945




Dimensions

BuzziBalance Small

Front

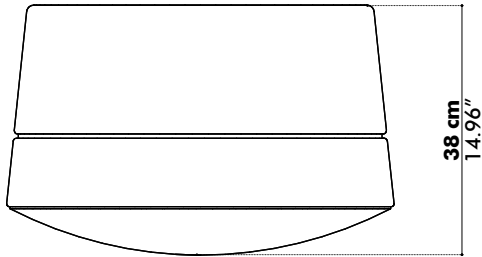


Top




BuzziBalance Small High

Front

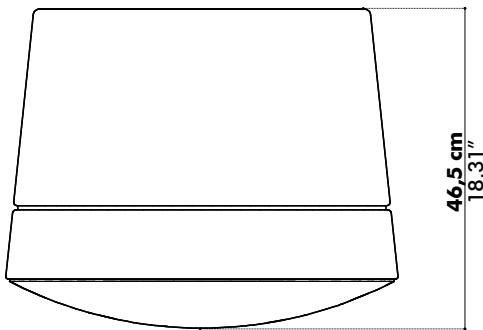


Top




BuzziBalance Large

Front

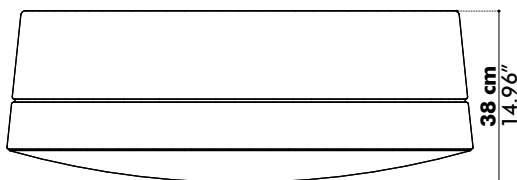


Top

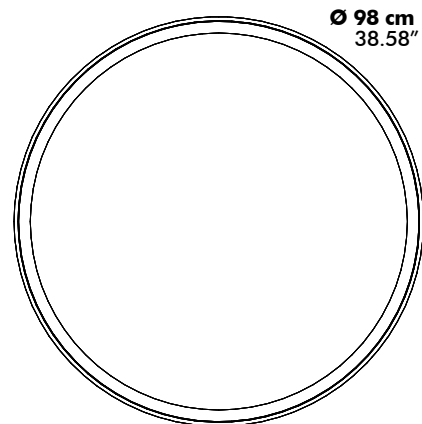


BuzziBalance Board Small

Front




Top

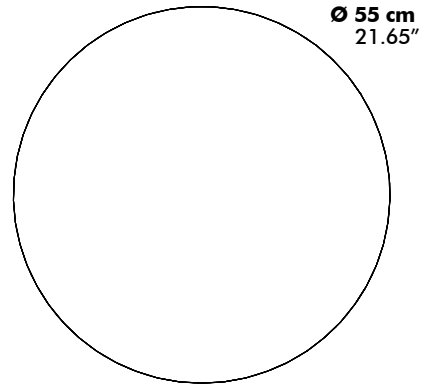


BuzziBalance Board Large

Front




Top

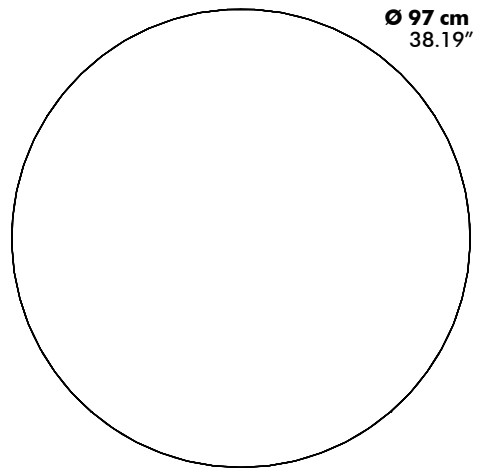

Acoustics

BuzziBalance Small | Large

Equivalent sound absorption area in m² per object

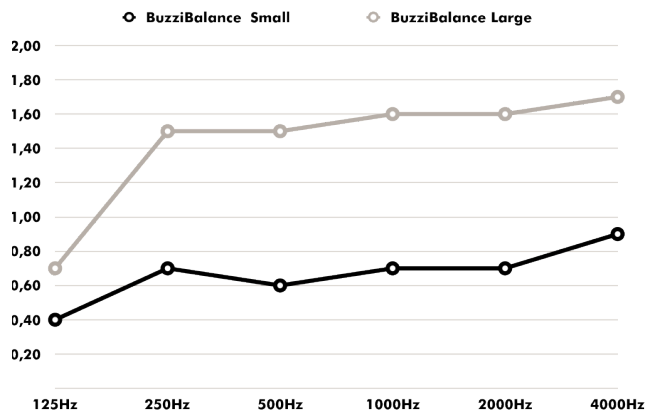

| Hz | Small Aeq/m ² | Large Aeq/m ² |
|------|--------------------------|--------------------------|
| 125 | 0.40 | 0.70 |
| 250 | 0.70 | 1.50 |
| 500 | 0.60 | 1.50 |
| 1000 | 0.70 | 1.60 |
| 2000 | 0.70 | 1.60 |
| 4000 | 0.90 | 1.70 |

