

Daphne
Soundabsorbing Freestanding Panel

asset
space becomes place



NAME:


DAPHNE

DESCRIPTION:

Bicolor sound-absorbing and anti-reverberation felt leaves

APPLICATION:

- Freestanding - ECOdesk system

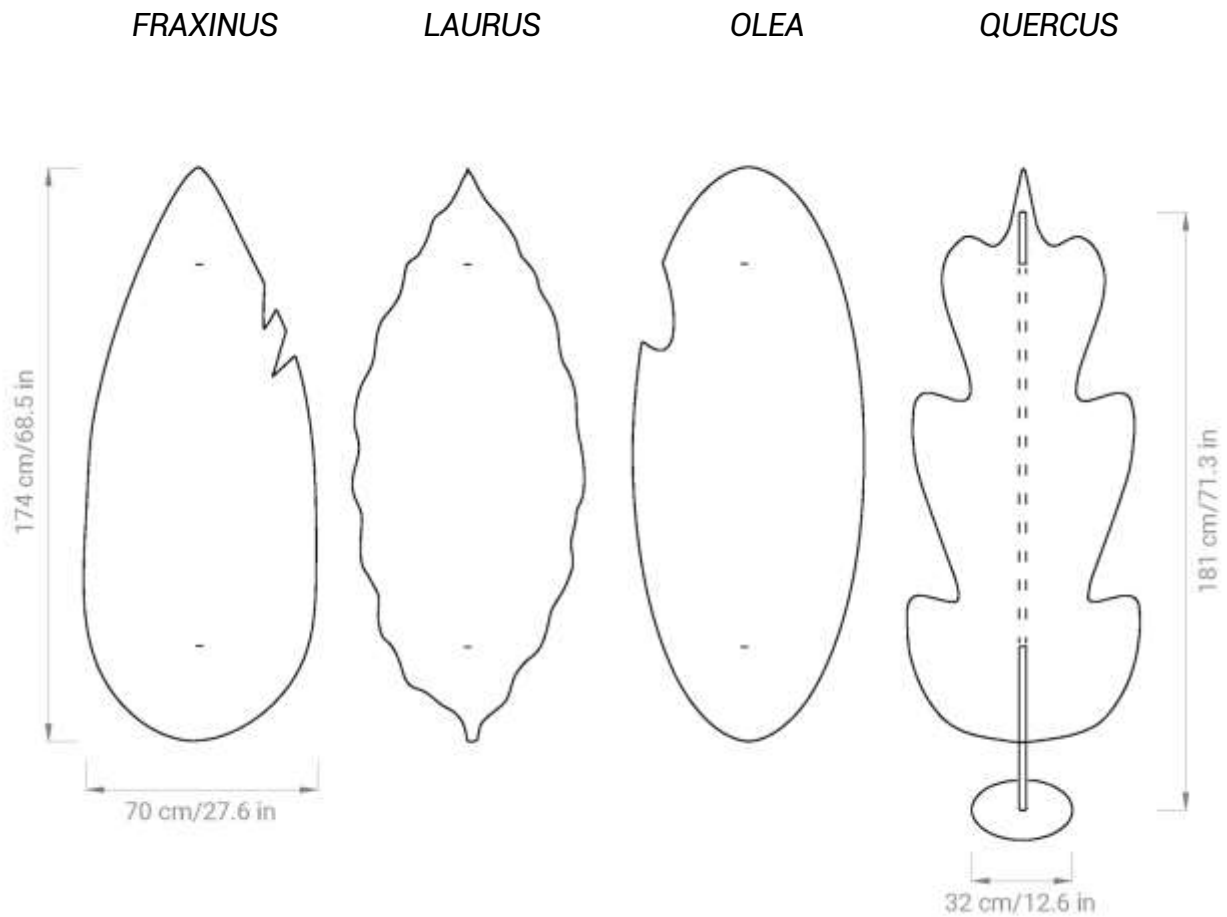

DIMENSIONS:

- Upright: Ø base **32** x H **181** cm
Ø base **12.6** x H **71.3** in
- Daphne: L **70** x H **174** cm x THK **9** mm (4,5 + 4,5)
L **27.6** x H **68.5** x THK **0.36** in (0.18 + 0.18)

WEIGHT:

- +/- **7** Kg
+/- **15** lb

COMPOSITION:

- **ECOfelt** - 90% wool, 10% polyester
- **PETfelt** - 100% PET

COLOR DIFFERENCES:

Slight differences between dyeing lots are considered normal

RECYCLABILITY:

- **ECOfelt:** Textile ecology of natural wool felts
- **PETfelt:** Material made from recycled plastic bottles, recyclable product respecting the environment

MAINTENANCE:

Regularly and carefully use the vacuum cleaner with a smooth spout, or use soft bristle brushes or professional pads for padding and upholstery



CERTIFICATIONS:

- **FIRE REACTION CLASS UE:**

B-s2, d0 - *OPTIONAL*



- **FIRE REACTION CLASS USA:**

Class A - ASTM E 84-18 - *OPTIONAL*



- **SOUND ABSORPTION REPORT:**

UNI EN ISO 354: 2003

UNI EN ISO 11654: 1998




Felt (THK 8 mm | 0.32 in):

Sample description: Fabric for surface, wall ceiling furniture application, Model: Feltro 8 mm
Mounting Type: A


Sample area: 11.34 m²
Reverberation room volume: 161.3 m³

f [Hz]	α_n [-]
100	0.02
125	0.01
160	0.03
200	0.04
250	0.03
315	0.05
400	0.06
500	0.10
630	0.13
800	0.19
1000	0.25
1250	0.34
1600	0.41
2000	0.48
2500	0.53
3150	0.60
4000	0.65
5000	0.69

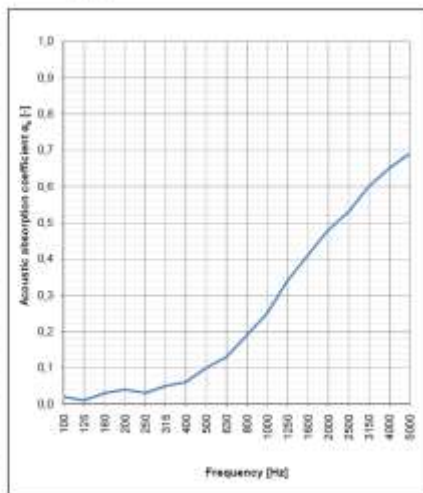

Evaluation based on laboratory measurement results by means of a technical method.

ECOfelt

Composizione | composition: 
 90% lana, 10% poliestere.
 90% wool, 10% polyester.

Altezza | width:
 146 ± 5% cm

Peso weight:	Spessore thickness:
420 gr/mtl	1,5 mm
820 gr/mtl	3 mm
1200 gr/mtl	4,5 mm
1630 gr/mtl	6 mm
2000 gr/mtl	8 mm



ECOfelt Fresh air 976
 PETfet Beige 16



ECOfelt Mustard 54
 PETfet Grey 4




ECOfelt Salmon 317
 PETfet Dark Orange 14



ECOfelt Quartz rose 940
 PETfet Jugle green 31

PETfelt

Composizione | composition: 
 100% PET.

Altezza | width:
 146 ± 5% cm

Peso weight:	Spessore thickness:
600 gr/mtl	2 mm
1200 gr/mtl	4,5 mm

Resistenza al fuoco 
 Fire resistance
 OPZIONALE | OPTIONAL:
 EU - B-s2, d0
 UNI EN 13823:2010+A1:2014
 USA - Class A
 ASTM E 84-18



ECOfelt Acid green 611E
 PETfet Grey 4



PETfelt Celadon 39
 ECOfet Lagoon 608



PETfelt Yellow 3
 PETfet Grey green 22

Piccole impurità o macchie di colore sono da attribuire al processo di produzione e unicità del prodotto. Small impurities or color spots belong to production and product uniqueness.

Prodotto riciclabile nel rispetto dell'ambiente. 
 Recyclable product respecting the environment

Differenze di colore | color matching: Leggere differenze di colore fra una partita e l'altra sono da considerarsi normali. Slight differences between dyeing lots are considered normal.

Manutenzione | maintenance: Usare con regolarità l'aspirapolvere a beccuccio liscio, oppure utilizzare spazzole a setole morbide o detergenti professionali per imbottiti. Non spazzolare. | Use regularly the vacuum cleaner with smooth spout, or brushes with soft bristles, or upholstered professional cleaners. Don't brush.



